


PRIS.MANILA

FORMATO/ <i>FORMAT</i>	20X60
ESPESOR/ <i>THICKNESS</i> (mm)	9,5
PRODUCTO/ <i>PRODUCT</i>	GRES ESMALTADO/ <i>GLAZED GRES</i>
TIPO/ <i>KIND</i>	ESMALTADO/ <i>GLAZED</i>
GRUPO/ <i>GROUP</i>	BIIa - GL

NORMA APLICABLE EN 14411 ANEXO J
APPLICABLE STANDARD ISO 13006 ANNEX J

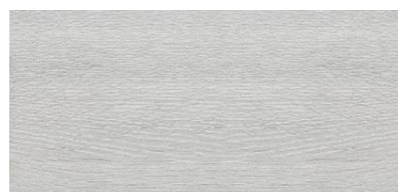

ENSAYOS/ <i>TESTS</i>		RESULTADOS/ <i>RESULTS</i>	
	UNE-EN ISO 10545-2 DIMENSIONES Y ASPECTO SUPERFICIAL	DIMENSIONES	CUMPLE CON LA
	UNE-EN ISO 10545-2 DIMENSIONS AND SURFACE QUALITY	<i>DIMENSIONS</i>	NORMA COMPLIES WITH THE STANDARD
	UNE-EN ISO 10545-3 ABSORCIÓN DE AGUA	VALOR MEDIO (%)	3%-6%
	UNE-EN ISO 10545-3 WATER ABSORPTION	AVERAGE VALUE (%)	
	UNE-EN ISO 10545-4 RESISTENCIA A LA FLEXIÓN	FUERZA DE ROTURA	1.100 – 1.900 N
	UNE-EN ISO 10545-4 MODULUS OF RUPTURE	<i>BREAKING STRENGTH (N)</i>	
	UNE-EN ISO 10545-9 RESISTENCIA AL CHOQUE TÉRMICO	RESISTENCIA A LA FLEXIÓN	30 – 40 N/mm ²
	UNE-EN ISO 10545-9 THERMAL RESISTANCE	<i>MODULUS OF RUPTURE (N/mm²)</i>	
	UNE-EN-ISO 10545-11 RESISTENCIA AL CUARTEO	RESULTADO	RESISTE
	UNE-EN-ISO 10545-11 CRAZING RESISTANCE	<i>RESULT</i>	<i>RESISTS</i>
	UNE-EN ISO 10545-13 RESISTENCIA QUÍMICA UNE-EN ISO 10545-13 CHEMICAL RESISTANCE	CLORURO AMÓNICO AMMONIUM CHLORIDE 100 g/l	A
		HIPOCLORITO SÓDICO SODIUM HYPOCHLORITE 20 mg/l	A
	UNE-EN ISO 10545-14 RESISTENCIA A LAS MANCHAS UNE-EN ISO 10545-14 STAIN RESISTANCE	ÁCIDO CLORHÍDRICO HYDROCHLORIC ACID 3%	CUMPLE CON LA
		ÁCIDO CÍTRICO CITRIC ACID 100 g/l	NORMA COMPLIES WITH THE STANDARD
		HIDRÓXIDO POTÁSICO POTASSIUM HYDROXYDE 30 g/l	
		ÓXIDO VERDE EN ACEITE LIGERO GREEN AGENT IN LIGHT OIL	5
		SOLUCIÓN ALCOHÓLICA DE YODO IODINE SOLUTION IN ALCOHOL	5
		ACEITE DE OLIVA OLIVE OIL	5

OBSERVACIONES:

VºBº LABORATORIO:


CALIDAD
QUALITY